






COMMERCIAL COILS & COATINGS

COMMITTED TO QUALITY PRODUCTS, QUICK DELIVERIES AND COMPETITIVE PRICES



Commercial Coils

OEM Replacement Coils
Custom Replacement Coils

Condenser Coils
Evaporator Coils
Refrigeration Coils
Water Coils
Booster Coils
Steam Coils
Tube Bundle Coils

Comprehensive solutions with expert assistance, same-day price quotes and swift delivery. High-quality, competitively priced coils tailored to your specifications for any equipment or brand.

Commercial Coatings

Heresite P-413

Immersion Dip & Bake, Corrosion protection, Humidity resistance, Chemical resistance

- Salt Spray ASTM B117: 18,000 hours

Heresite ES-606

Spray application, corrosion protection, humidity resistance, chemical resistance

- Salt Spray ASTM B117: Passes 5,000 hours

PPG PSX 700





Spray application, corrosion protection, humidity resistance, chemical resistance

- Salt Spray ASTM B117: 5,500 hours

Blygold PoluAl XT

Spray application, corrosion protection, humidity resistance, chemical resistance

- Salt Spray ASTM B117: 4,000+ hours (heat exchanger), 11,000 hours (aluminum plate)

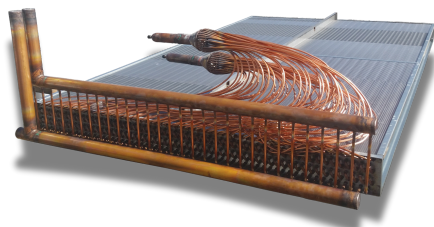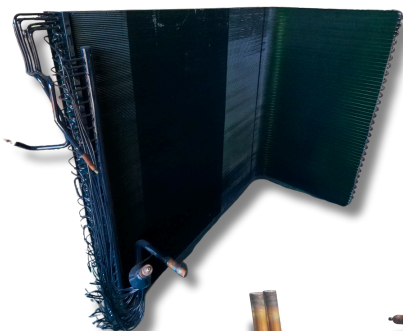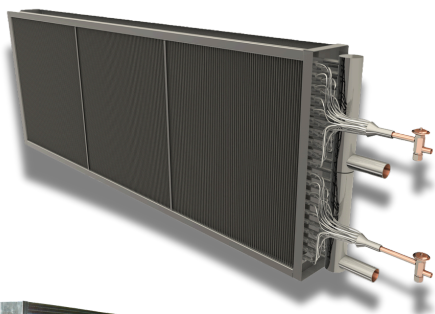

FIN / TUBE SPECIFICATIONS

PRODUCT CAPABILITIES

Tube Diameter	Tube Wall Width	Tube Stagger	Fin Configuration	Fin Materials	FPI Range
3/8" Tubes	0.014" 0.016" 0.020" 0.022"	1.00" x 0.75"	Sine Wave V-Waffle Louvered	0.0045" Aluminum 0.0060" Aluminum 0.0075" Aluminum 0.0045" Copper	9-16
3/8" Tubes	0.014" 0.016" 0.020" 0.022"	1.00" x 0.866"	Sine Wave Louvered Flat	0.0045" Aluminum 0.0060 Aluminum 0.0075" Aluminum 0.0045" Copper	8-20
1/2" Tubes	0.016" 0.025"	1.50" x 1.299"	Sine Wave	0.0060 Aluminum 0.0075" Aluminum 0.0100" Aluminum 0.0060" Copper	7-16
1/2" Tubes	0.016" 0.025"	1.25" x 1.083"	Sine Wave Flat	0.0060" Aluminum 0.0075" Aluminum 0.0100" Aluminum 0.0060" Copper	7-16
5/8" Tubes	0.020" 0.025" 0.035" 0.049"	1.50" x 1.299"	V-Waffle Flat	0.0045" Aluminum 0.0060" Aluminum 0.0075" Aluminum 0.0045" Copper	4-14

FIN PATTERN CAPABILITIES

Series	Fin Pattern	Max # Rows	Fin Configuration	Min. FPI	Max. FPI
13	1/2 x 1.25 x 1.082	12	Sine Wave	7	16
14	1/2 x 1.5 x 1.299	12	Sine Wave	4	16
36	3/8 x 1 x 0.866	12	Sine Wave	4	20
35	3/8 x 1 x 0.866	12	Louvered	4	20
37	3/8 x 1 x 0.75	12	V-Waffle	9	16
59	5/8 x 1.75 x 1.5	8	Flat	4	14
57	5/8 x 1.5 x 1.299	8	V-Waffle	4	9
25	5/16 x 1 x 0.625	12	Sine Wave	8	20
30	3/8 x 1 x 0.625	6	V-Waffle	10	15

CONNECTION MATERIALS / TYPES

Copper sweat, MPT, FPT, Carbon Steel MPT, Grooved, Flanged Red Brass MPT


CASING MATERIALS

G-90 Galv. Steel
304 Stainless Steel
316/L Stainless Steel
Mill Finish Aluminum

CASING STYLES

Inverted Flanges
Stackable Flanges
Non-Stackable Flanges
Mounting Holes
Lifting Lugs
Collard End Plates

MADE IN AMERICA - WORLDWIDE SHIPPING - ISO CERTIFIED

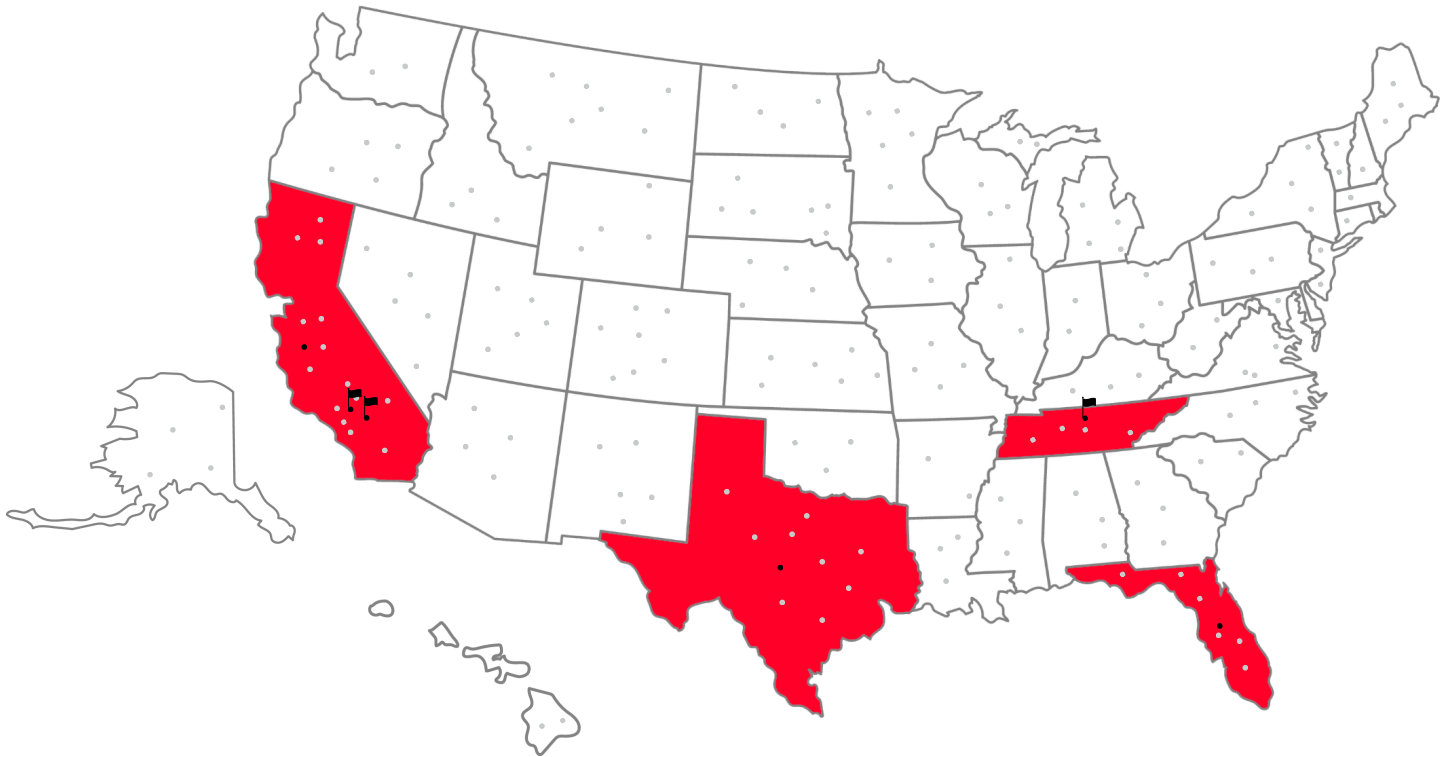

Coil Production Facility

2630 Pacific Park Dr.
Whittier, CA 90601
(800) 421-7070
(562) 908-0680



Coil Production Facility

122 A Davis St.
Portland, TN 37148
(562) 908-0680

Coating Facility

4586 Danito Ct.
Chino, CA 91710
(909) 993-5925

